



#### **Product description:**

NSA PRO++ is a smooth and creamy thin-set adhesive for installing small to medium fromat ceramic tiles,vitrified tiles wall & floor in interior areas. Applications.



## **Application:**

Designed for interior floor and wall application.

Pack Size : 20 kg

Colour : Grey

**Note** : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage** : For a 3 mm bed thickness & after using of notch trowel, the coverage.approximately 40-50 sq.ft per 20 kg.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

www.hibondchem.com



20 kg.





#### **Product Description:**

NSA GOLD is a premium quality,polymer modified thin-set adesive for fixing vitrified tiles,natural stone on variety of interior & exterior substrates for wall nd floor applications.



## **Application:**

Designed for interior floor and wall application of all types of ceramic,vitrified tiles,natural stone over concrete and a varietyod sub.

Pack Size : 20 kg

Colour : Grey

**Note** : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage** : For a 3 mm bed thickness & after using of notch trowel, the coverage.approximately 40-50 sq.ft per 20 kg.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

www.hibondchem.com



20 kg.



#### **Product description:**

NSA Dimond is a premium quality,high polymer modified thin-set adesive for fixing vitrified tiles,natural stone on variety of interior & exterior substrates for wall nd floor applications.



## **Application:**

Designed for interior floor and wall application of all types of ceramic,vitrified tiles,natural stone,glass mosaic over concrete and a varietyod sub.

Pack Size : 20 kg

Colour : white

**Note** : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage** : For a 3 mm bed thickness & after using of notch trowel, the coverage.approximately 40-50 sq.ft per 20 kg.

**Shelf Life :** 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

www.hibondchem.com





#### **Product description:**

NSA platinum is a premium quality,high polymer modified and multi-purpose thin-set adesive for fixing vitrified tiles,slab tiles,natural stone,swimming pool tiles,marble on variety of interior & exterior substrates for wall nd floor applications.

#### **Application:**

Designed for interior floor and wall application of all types of ceramic,vitrified tiles,natural stone,marble,glass mosaic over concrete and a varietyod sub.

Pack Size : 20 kg

Colour : white

**Note** : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage** : For a 3 mm bed thickness & after using of notch trowel, the coverage.approximately 40-50 sq.ft per 20 kg.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

www.hibondchem.com


## Superior Quality. NSA - Platinum Π Z NSA -Platinum **20 kg**. **EXCLUSIVE BONDING**....

# pu base adhesive

## **Product description:**

Multi-fix PU based adheisve is two component, polyurethane-epoxy hybrid technology based,highly flexible,high-

performance,multipurpose,thine-set adhesive for fixing all types of tiles&stone,metal&glass tiles interior&exterior floor&wall.

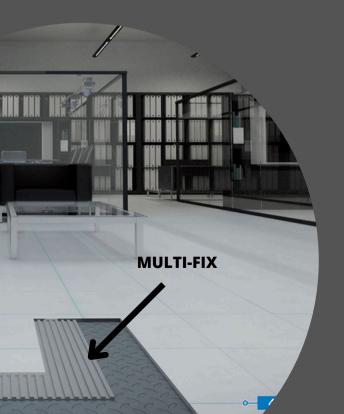

## **Application:**

Floor and walls.internal&external ares,window/door fram,vibrational area,kitchens,blaconies,flat roofs,domes,terraces,commercial&ind ustrial appliction.

Pack Size : 1 kg.&4 kg.

MIXING RATIO : (04:01)This material is available in two part, Part A (pu Resin), Part B (pu Hardener). mix Parts A and B thoroughly and as the mixing becomes uniform, suubstrates ith itas proper appliances.

**Coverage** : 16-20 sq.ft/4 kg pack-1.5 mm bed thickness(use 3 mm x 3 mm notch.)

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

#### www.hibondchem.com



## 1 kg.& 4 kg.

## ADHESIVE BLOCK-FIX

#### **Product description:**

Block-fix is a dry powder based ready mix thin layer jointing mortar use for laying AAC block,fly ash bricks,cement blocks and red clay bricks etc.



#### **Application:**

laying and jointing AAC blocks, jointing of pre-stressed concrete slabs, panels, parapet walls, jointing og cement window and door frames, graden, boundary walls etc..

Pack Size : 40 kg

Colour : Grey

**Note** : The coverage will vary depending on trowel notch size, type, size of blocks and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



**40 kg**.

# TILES-GROUT

#### **Product description:**

Tiles grout aqua seal is a superior quality and high polymer modified hydrophobic cement .For beer peformance it is recommended to use out with hi-bond latex additive mixture.



## **Application:**

Used for fiiling Tiles grouting 1 mm to 4 mm in both interior and exterior aress. (kithchens,bathrooms,balconic,terra ces,swimmingpools,showrooms...etc)

Pack Size : 500 gm(ship pck 20pcs),1 kg(ship pck 10 pcs)

MIXING RATIO : Use approx 300 ml-400 ml of water of latex additive mixture for 1 kg.(better performance use to 200 ml of additive per 1 kg. grout)

**Coverage** : Varies with tiles size and grout width.

**Shelf Life :** 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

www.hibondchem.com



1 kg.

## GROUT PREMIUM EPOXY GROUT

## Product description:

Premium epoxy grout is specifically designed for use in application of ceramic tile,vitrified tiles marble,glass,stone where staining is expected.



## **Application:**

Used to fill gaps between ceramic, porcelain, vitrified tiles, natural stones, glass mosaics, and other surfaces. – It is perfect for grouting surfaces such as bathrooms, kitchens, living rooms, swimming pools, and commercial areas since it can be used in both dry and wet regions.

Pack Size : 1 kg.&5 kg.

MIXING RATIO : This material is available in three part, Part A (Resin), Part B (Hardener) and Part C (Filler), AT first. mix Parts A and B thoroughly and as the mixing becomes uniform, add Part C and make it a consistent paste. Then apply this paste to suubstrates ith itas proper appliances.

**Coverage** : Varies with tiles size and grout width.

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)



1 kg.& 5 kg.

## grout SPARKLE EPOXY GROUT

## **Product description:**

Sparkle epoxy grout is specifically designed for use in application of ceramic tile,vitrified tiles marble,glass,stone where staining is expected.



## **Application:**

Used to fill gaps between ceramic, porcelain, vitrified tiles, natural stones, glass mosaics, and other surfaces. – It is perfect for grouting surfaces such as bathrooms, kitchens, living rooms, swimming pools, and commercial areas since it can be used in both dry and wet regions.

#### Pack Size : 1 kg.&5 kg.

MIXING RATIO : This material is available in three part, Part A (Resin), Part B (Hardener) and Part C (Filler), AT first. mix Parts A and B thoroughly and as the mixing becomes uniform, add Part C and make it a consistent paste. Then apply this paste to suubstrates ith itas proper appliances.

**Coverage** : Varies with tiles size and grout width.

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)



## 1 kg.& 5 kg.

## WATERPROOFING SBR LATEX

## **Product description:**

SBR LATEX is an acrylic polymer based high performance multipurpose effective coating system foe repairs & waterproofing solution.



## **Application:**

waterproofing,repairing structures,surface treatment and protecting,wxcellent choice to use new and old substrate,can use bond coat mixing with cement mortar and concrete.

Pack Size : 200 ml,500 ml,1 ltr,5ltr&20 ltr.

colour : Milky white liqulid

How to use : All surfaces must be clean & dry.It is used as a bonding agent between old&new concrete,for cementitious substrates,waterproofing coating for small areas in bathrooms,balconies & roofs.

MIXING RATIO: As a Waterproof coating 1:1.5(SBR:Cement),Pasivator coting & bond coat 1:1(SBR:Cement)

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)



200 ml. ,500ml. ,11tr.& 5 Itr& 20 ltr.

## ADMIXER LATEX ADDITIVE

## **Product description:**

LATEX ADDITIVE is a liquid latexbased additives for cementitious tiles adheive & grouts and is used to improve water resistance as well as bond strenght & flexibility.



## **Application:**

Is a high quality,waer-based polymer emulsion for cement based tiles adhesive and grout,where a degree of flexibility,vibration resistance or increased adhsive strength.

Pack Size : 200 ml,1 ltr.

colour: milky white liqulid

**How to use** : Use 1 kg, grout powder in approx 200 ml to 300 ml. latex additive mix and 20 kg. adhesive powder in approx 2 to 5 ltr. additive mix.

MIXING RATIO: Add 200gm HI-bond latex additive to 1kg cementitious tile grout. (2) Mix it thoroughly till homogenous paste obtain.

(3) Apply mixed paste with suitable application blade.

(4) Remove spillage material with damp sponge/cloth.

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

www.hibondchem.com

# <section-header><section-header><section-header><section-header>

**200 ml**. ,1 ltr.

## ADMIXER CEMENT TONIC-LW+

#### **Product description:**

CEMENT TONIC LLW+ is a new generation synthetically manufactured, high water reducing admixture for concrete & plaster.



## **Application:**

Cement tonic lw+ is a designed to increase the strength of conrete&provides higher early and ultimate strengths.

Pack Size : 5 ltr,20 ltr

colour: Yellowish light brown liqulid

How to use : It is Use for waterproofing of concrete,sandcement mortars,basements,roof slabs,screed,water retaining structures,suken slabs,terrace slabs,water tanks and sump tanks

MIXING RATIO: Add 200 ml HI-bond LW+ to 50 kg cement and 2-3 ltr Lw+ in 200 ltr. water mix.

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)



**5 ltr,20 ltr**.

# CLANING TILES CLEANER

## **Product description:**

Tiles cleaner is a high quality rapid active and decreasing solution for use on tiles,bath tubs,wash basin and concrete etc.



## **Application:**

interior & exterior wall& floor

Pack Size : 1 ltr.

Advantages: Powerful formula Fast action Easy to apply Remove cement films Ideal for interior & exterior areas Fast action

#### Note:

Do not use on surfaces that are not resistant to acids such as marble or terrazzo. keep away from children.

#### Coverage:

Coverage depende on the poposity of the surface stains, dilution etc.





**1 ltr**.

## SPACERS TILES SPACERS

#### **Product description:**

Tiles spacers allow you to achieve a consistent pattern when fixing wall/floor tiles and help to ensur that all tiles are laid are equidstant from each other in order fro the grout to then be applied.



**Available size:** 2mm,3mm,4mm,5mm

Pack Size : 100 pcs/pkd

## TILES EQUALIZER (LEVLAR KIT)

Pack Size: CLIP – 50 PCS/PKD WEDGE – 50 PCS/PKD





#### An ISO 9001 : 2008 Certified Company



#### Mfg:Mktd.By

## **HI-BOND CHEMICAL**

## Address:

Rafaleshwar GIDC,Plote no.257/258/259,8-A National highway,MORBI-363642 (Guj.) INDIA



#### Website www.hibondchem.com

.



hibondchemical@gmail.com

